



JAYASAKTHI
ROOFING

ஜெயசக்தி ரூஃ பிங் பிரைவேட் லிமிடெட் JAYASAKTHI ROOFING PVT. LTD.


Roofing & Wall Cladding

Model Your Dream Structure

Our range of Roofing and Wall Cladding systems, made from raw materials of the highest quality in accordance with strict American / Japanese industrial standards, offers flexibility of design to suit any construction need, be it your home, office, business or factory. Our products are designed and made to meet your aesthetic needs and gives you the opportunity to model your dream structure.

JAYASAKTHI ROOFING SPECIALITY :

- Attractive Color and Flexible Designs
- Resistance to Extremities of Weather
- Super Heat Reflection Ratio & Superior Heat Resistance
- Environment Friendly & Fire Proof
- Convenient and Quick Solutions
- Economical Products
- Low Maintenance
- Excellent Corrosion Resistance

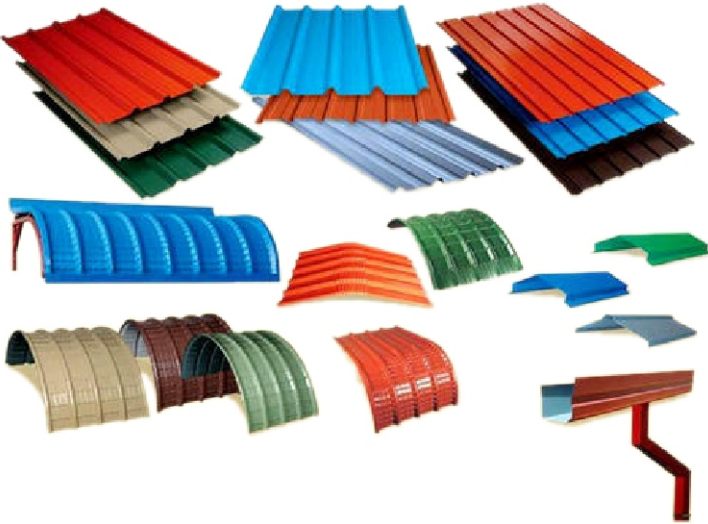

Color Range



CAULFIELD GREEN
RAL 6009



BEIGE
RAL 8024



BRICK RED
RAL 3003



MIST GREEN
RAL 6011




ROYAL BLUE
RAL 5017






TAURUS BLUE
RAL 5009



OFF WHITE
RAL 9002



SKY BLUE
RAL 5012

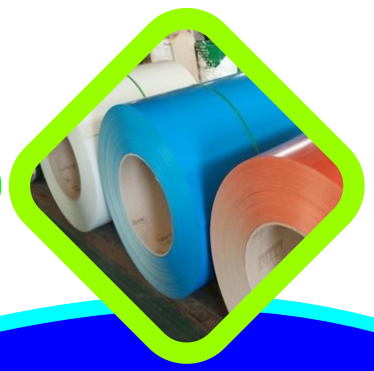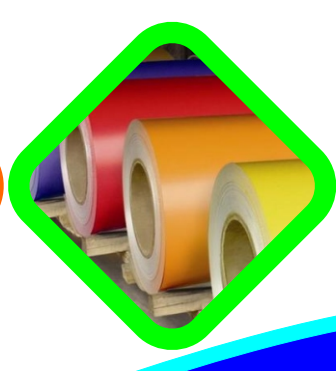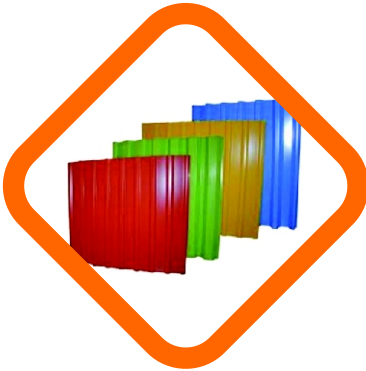

#3/171B, Rajiv Gandhi Salai (OMR),
Mettukuppam, Thoraipakkam, Chennai -600 097.
Tel .: 9884441326, 9940457326, 9884441325
Email : jayasakthiroofing@gmail.com

Material Specifications

Pre-Painted Galvanized Steel Sheets (GI-Base)

Zinc coating	: Z 120 (Optional Z 80)
Primer service coat	: 5 microns epoxy / PU on both sides
Paint coating	: Regular Modified Polyester (RMP) (Optional - Silicon Modified Polyester & PVF 2)
Painting thickness (top)	: 18 ~ 20 microns
Painting thickness (bottom)	: 5 ~ 7 microns
Surface paint reflection	: Glossy finish (optional Matt Finish)
Conforms to	: ASTM A653, IS277, JIS3312, AS1397


Pre-Painted Alu - Zinc Steel Sheets (Galvalume*) (55% Aluminium 43% Zinc 1.5% Silicon)

Alu - Zinc coating	: AZ 150 (Optional AZ 70)
Primer service coat	: 5 microns epoxy / PU on both sides
Paint coating	: Regular Modified Polyester (RMP) (Optional - Silicon) Modified Polyester & PVF 2)
Painting thickness (top)	: 18 ~ 20 microns
Painting thickness (bottom)	: 5 ~ 7 microns
Surface paint reflection	: Glossy finish (Optional Matt Finish)
Conforms to	: ASTM A755, IS277, JIS3322, AS1397
Tensile Strength	: 345 ~ 550 MPa





Roofing Profile



JAYASAKTHI ROOFING PVT.LTD.

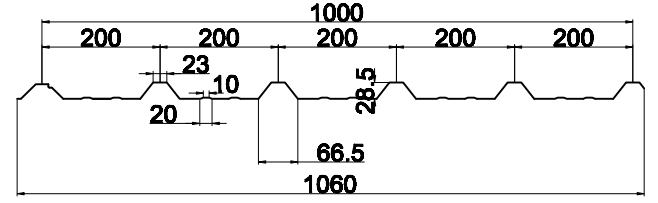

Structure of Pre-Painted Steel Sheet

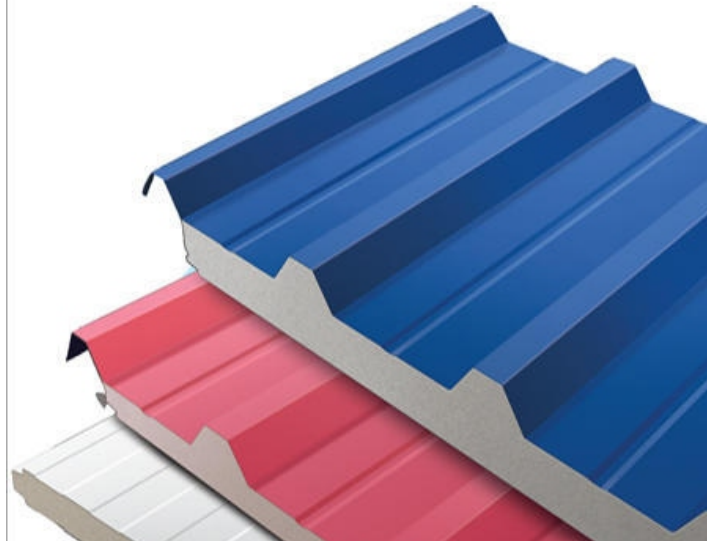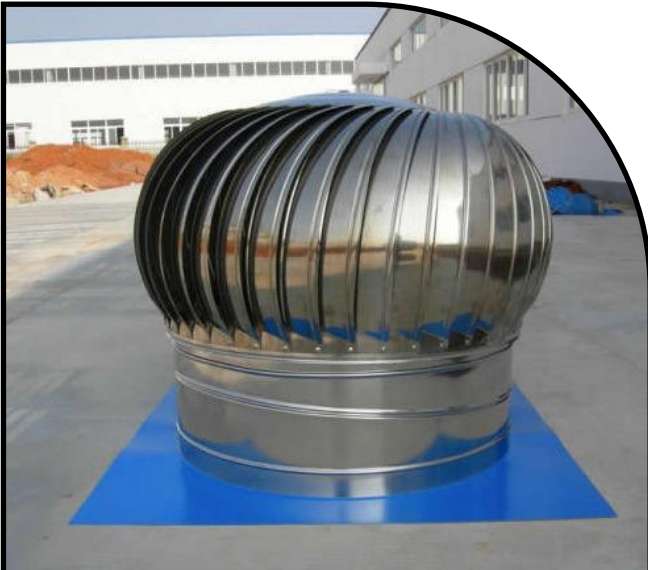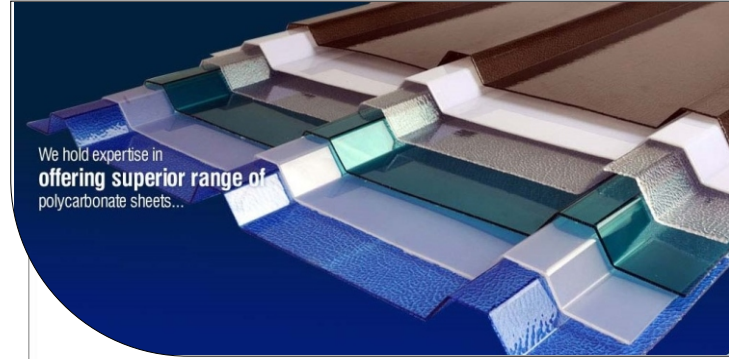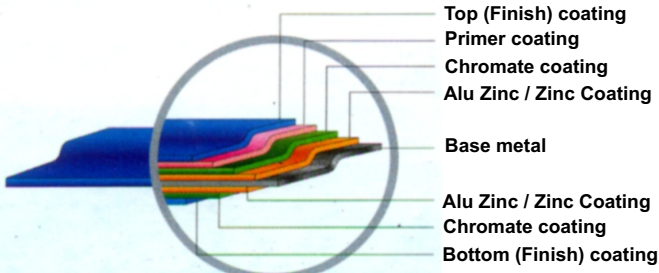

ஜெயசக்தி ரூஃ பிங் பிரைவேட் லிமிடெட்

#3/171B, ராஜுவ்காந்தி சாலை, (OMR) மேட்டுக்குப்பம், துரைப்பாக்கம், சென்னை-600097.
அலைபேசி : 9884441326, 9940457326, 9884441325 இ-மெயில் : jayasakthiroofing@gmail.com